

TR02直线导轨 Low-profile linear guide rails



产品特性 Product features



- 表面经过硬质氧化铝合金
 - 配合TRC02免维护滑台使用
 - 轻量化设计
- Made of hard anodized surface of aluminum alloy
 - Maintenance-free with TRC02 roller carragies
 - Lightweight design

TR02

CSB-LIN®

www.csb-ep.com
sales@csb-ep.com

标准规格 Standard specifications

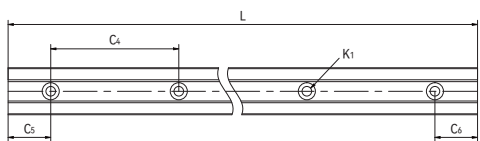

产品编码 Part No.:

TR02-15-0000-NH

空白Blank: 带安装孔 With mounting holes
NH: 无安装孔 No mounting holes
长度 Length
宽度 Width

产品编码 Part No.	b [mm]	h [mm]	ha [mm]	a _{0.2} [mm]	h ₁ [mm]	C ₅ =C ₆ [mm]		C ₄ [mm]	*K ₁ [mm]	L max. [mm]	重量 Weight [Kg/m]
						min.	max.				
TR02-15-0000	22	15	6.4	15	10	20	49.5	60	M4	4000	0.6

*K₁用于螺栓 For bolts

产品编码 Part No.	b [mm]	h [mm]	ha [mm]	a _{0.2} [mm]	h ₁ [mm]	C ₅ =C ₆ [mm]		C ₄ [mm]	*K ₁ [mm]	L max. [mm]	重量 Weight [Kg/m]
						min.	max.				
TR02-15-0000-NH	22	15	6.4	15	-	-	-	-	-	4000	0.6

电话: 0573 84186133/84185527
Tel: 0086 573 84187009



TRC02导轨滑块 Guide rail carriages



产品特性 Product features

- 安装EPB13标准滑动元件
 - 自润滑、免维护
 - 带独立间隙调整装置
 - 用于TR02直线导轨
 - 可选配Y或Z方向浮动型号
- Fitted EPB13 standard sliders
 - Maintenance-free, dry-running
 - With individual clearance adjustment
 - For TR02 linear guide rails
 - Optional floating bearing version in Y or Z direction

标准规格 Standard specifications

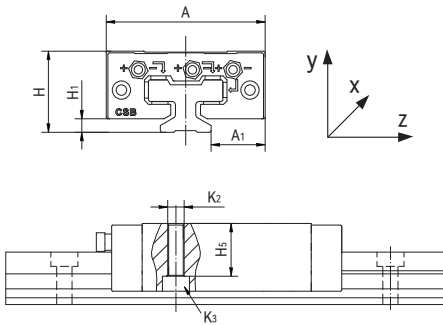

产品编码 Part No.:
TRC02-15-FLY

可选 Optional:
FLY: 浮动方向Floating direction Y
FLZ: 浮动方向Floating direction Z
导轨宽度 Guide rail width

产品编码 Part No.	A [mm]	A ₁ ±0.35 [mm]	A ₂ [mm]	C [mm]	C ₁ [mm]	C ₂ [mm]	C ₃ [mm]	H ±0.35 [mm]	H ₁ ±0.35 [mm]	H ₅ [mm]	K ₂ [mm]	K ₃ [mm]	锁紧扭矩 Tightening torque [Nm]	静态载荷 Static load					重量 Weight [kg]
														Coy ±	Coz ±	Mox	Moy	Moz	
TRC02-15	47	16	38	74	50	30	9	24	4	16	M5	M4	1.5	4000	2000	32	25	25	0.11

*TRC02-15-FLY /FLZ: 最大浮动间隙Max.floating 0.3mm