

KER转角轴承 Knife edge rollers



产品特性 Product features


- 自润滑、免维护
- 低驱动力
- 抗灰尘、低噪音
- 抗化学腐蚀，可用于液体环境
- 紧凑的偏转半径
- 延长传输带寿命
- 高性价比
- 材料：EPB18
- Self-lubricating, maintenance-free
- Low driving force
- Resistant to dust, low noise
- Resistant to chemical corrosion, available in liquid environment
- Compact deflection radius
- Extend the life of the belt
- Cost-effective
- Materials: EPB18

KER18

CSB-LIN®

www.csb-ep.com
sales@csb-ep.com电话: 0573 84186133/84185527
Tel: 0086 573 84187009

标准规格 Standard specifications

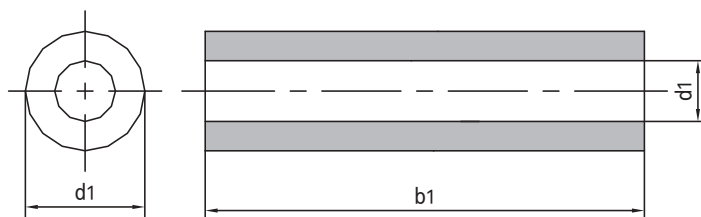

产品编码 Part No.:

KER18-0309-50

长度 Length

外径 Outer diameter

内径 Inner diameter

材料 Material: EPB18

产品编码 Part No.	d_1 +0.1/0 [mm]	d_2 ±0.1 [mm]	b_1 0/-0.3 [mm]
KER18-0309-50	3.1	9.0	50
KER18-0409-50	4.1	9.0	50
KER18-0511-70	5.1	11.0	70
KER18-0514-70	5.1	14.0	70
KER18-0612-70	6.1	12.0	70
KER18-0614-70	6.1	14.0	70
KER18-0812-70	8.1	12.0	70
KER18-0814-70	8.1	14.0	70
KER18-0818-70	8.1	18.0	70
KER18-1020-70	10.1	20.0	70


KER转角轴承 Knife edge rollers



产品特性 Product features

- 硬质陶瓷化表面铝管
- 安装高耐磨轴承EPB7
- 高精度、长寿命
- 较低的驱动力矩
- 抗灰尘、低噪音
- 紧凑的偏转半径
- 长度可根据要求
- 长期工作温度-40°C/+90°C
- Hard anodized surface aluminum tube
- High anti-wear EPB7 bushings
- High precision and long life
- Low driving force
- Resistant to dust, low noise
- Compact deflection radius
- More length upon request
- Long-term application temperature -40°C/+90°C

标准规格 Standard specifications

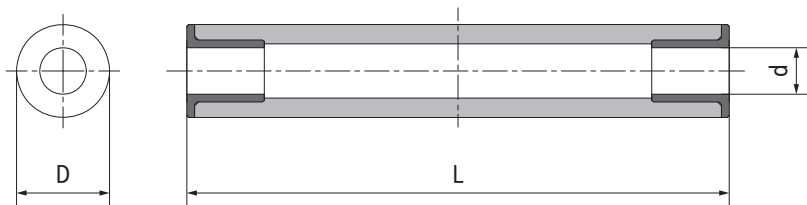

产品编码 Part No.:

KER7-0409-30-AL

材料 Material
长度 Length
外径 Outer diameter
内径 Inner diameter
材料 Material: EPB7

产品编码 Part No.	d E10 [mm]	d公差 Tolerance [mm]	D [mm]	D公差 Tolerance [mm]	L 0/-0.3 [mm]
KER7-0409-30-AL	4	0/+0.10	9	0/-0.022	30
KER7-0409-50-AL	4	0/+0.10	9	0/-0.022	50
KER7-0511-30-AL	5	0/+0.10	11	0/-0.027	30
KER7-0511-50-AL	5	0/+0.10	11	0/-0.027	50
KER7-0511-70-AL	5	0/+0.10	11	0/-0.027	70
KER7-0612-30-AL	6	0/+0.10	12	0/-0.027	30
KER7-0612-50-AL	6	0/+0.10	12	0/-0.027	50
KER7-0612-70-AL	6	0/+0.10	12	0/-0.027	70
KER7-0814-30-AL	8	0/+0.10	14	0/-0.027	30
KER7-0814-50-AL	8	0/+0.10	14	0/-0.027	50
KER7-0814-70-AL	8	0/+0.10	14	0/-0.027	70
KER7-0818-30-AL	8	0/+0.10	18	0/-0.027	30
KER7-0818-50-AL	8	0/+0.10	18	0/-0.027	50

产品编码 Part No.	d E10 [mm]	d公差 Tolerance [mm]	D [mm]	D公差 Tolerance [mm]	L 0/-0.3 [mm]
KER7-0818-70-AL	8	0/+0.10	18	0/-0.027	70
KER7-1016-50-AL	10	0/+0.10	16	0/-0.027	50
KER7-1016-70-AL	10	0/+0.10	16	0/-0.027	70
KER7-1016-100-AL	10	0/+0.10	16	0/-0.027	100
KER7-1420-50-AL	14	0/+0.10	20	0/-0.033	50
KER7-1420-70-AL	14	0/+0.10	20	0/-0.033	70
KER7-1420-100-AL	14	0/+0.10	20	0/-0.033	100
KER7-1825-50-AL	18	0/+0.10	25	0/-0.033	50
KER7-1825-70-AL	18	0/+0.10	25	0/-0.033	70
KER7-1825-100-AL	18	0/+0.10	25	0/-0.033	100


KER转角轴承 Knife edge rollers



产品特性 Product features

- 硬质陶瓷化表面铝管
- FDA等级与高耐磨轴承EPB23
- 高精度、长寿命
- 较低的驱动力矩
- 抗灰尘、低噪音
- 紧凑的偏转半径
- 长度可根据要求
- 长期工作温度 -100°C/+180°C
- Hard anodized surface aluminum tube
- FDA grade and high anti-wear EPB23 bushings
- High precision and long life
- Low driving force
- Resistant to dust, low noise
- Compact deflection radius
- More length upon request
- Long-term application temperature -100°C/+180°C

标准规格 Standard specifications

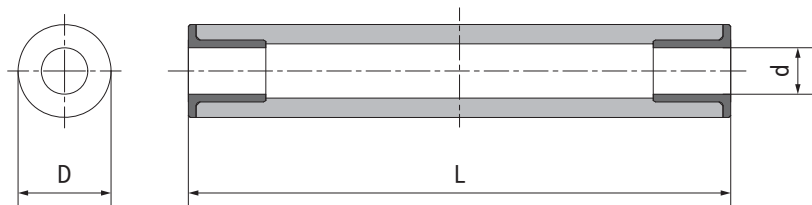

产品编码 Part No.:

KER23-0409-30-AL

材料 Material

长度 Length

外径 Outer diameter

内径 Inner diameter

材料 Material: EPB23

产品编码 Part No.	d F10 [mm]	d公差 Tolerance [mm]	D [mm]	D公差 Tolerance [mm]	L 0/-0.3 [mm]
KER23-0409-30-AL	4	+0.010/0.058	9	0/-0.022	30
KER23-0409-50-AL	4	+0.010/0.058	9	0/-0.022	50
KER23-0511-30-AL	5	+0.010/0.058	11	0/-0.027	30
KER23-0511-50-AL	5	+0.010/0.058	11	0/-0.027	50
KER23-0511-70-AL	5	+0.010/0.058	11	0/-0.027	70
KER23-0612-30-AL	6	+0.010/0.058	12	0/-0.027	30
KER23-0612-50-AL	6	+0.010/0.058	12	0/-0.027	50
KER23-0612-70-AL	6	+0.010/0.058	12	0/-0.027	70
KER23-0814-30-AL	8	+0.013/0.071	14	0/-0.027	30
KER23-0814-50-AL	8	+0.013/0.071	14	0/-0.027	50
KER23-0814-70-AL	8	+0.013/0.071	14	0/-0.027	70
KER23-0818-30-AL	8	+0.013/0.071	18	0/-0.027	30
KER23-0818-50-AL	8	+0.013/0.071	18	0/-0.027	50

产品编码 Part No.	d F10 [mm]	d公差 Tolerance [mm]	D [mm]	D公差 Tolerance [mm]	L 0/-0.3 [mm]
KER23-0818-70-AL	8	+0.013/0.071	18	0/-0.027	70
KER23-1016-50-AL	10	+0.013/0.071	16	0/-0.027	50
KER23-1016-70-AL	10	+0.013/0.071	16	0/-0.027	70
KER23-1016-100-AL	10	+0.013/0.071	16	0/-0.027	100
KER23-1420-50-AL	14	+0.016/0.086	20	0/-0.033	50
KER23-1420-70-AL	14	+0.016/0.086	20	0/-0.033	70
KER23-1420-100-AL	14	+0.016/0.086	20	0/-0.033	100
KER23-1825-50-AL	18	+0.016/0.086	25	0/-0.033	50
KER23-1825-70-AL	18	+0.016/0.086	25	0/-0.033	70
KER23-1825-100-AL	18	+0.016/0.086	25	0/-0.033	100