


WRU01多用型圆导轨滑块 Round rail sliding blocks(High-performance)



产品特性 Product features

- 耐磨层材料TEFPLAS® B
 - 使用温度±200℃
 - 最高连续速度1.5m/s
 - 重量轻、快速装配
 - 可用于WR系列单轨和双轨
 - 低噪音运行
- Wear layer material: TEFPLAS® B
 - Operation temperature ±200℃
 - Max. continuous running speed 1.5m/s
 - Fast assembly and light weight
 - For WR single and dual guide rails
 - Low noise operation

标准规格 Standard specifications

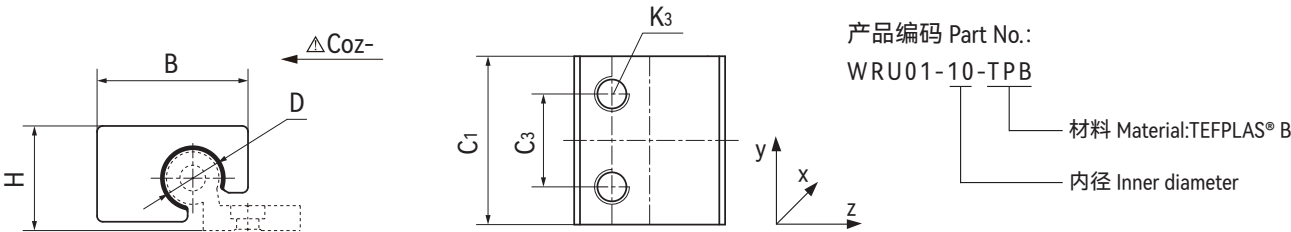

产品编码 Part No.	D [mm]	公差 Tolerance [mm]	B [mm]	C ₃ [mm]	C ₁ [mm]	H [mm]	K ₃ [mm]	静态载荷 Static load			重量 Weight [g]
								Coy- [N]	Coz+ [N]	Coz- [N]	
WRU01-10-TPB	10	+0.083/+0.020	26	16	29	18	M6	5800	5800	2900	20
WRU01-16-TPB	16	+0.102/+0.032	34.5	18	36	27	M8	11520	11520	5760	48
WRU01-20-TPB	20	+0.124/+0.040	42.5	27	45	36	M8	18000	18000	9000	99
WRU01-25-TPB	25	+0.124/+0.040	52.5	36	58	45	M10	29000	29000	14000	430